

Specification for Approval

Customer: _____

Customer P/N: _____

EEC P/N: AC-3225B-800U3

Spec No.: _____

Version No.: V0.1

Description: Common Mode Choke

Automotive Ethernet Application

1000Base -T1

Customer Approval		EEC Approval	
Inspected By:		Issued By:	Fuming Chen
Checked By:		Checked By:	Jerry Gu
Approved By:		Approved By:	Focus Wang
Approved Date:		Issued Date:	2022/11/12

Please Return One Copy to Us After Approved,TKS! (承认后请回寄一份,谢谢)

Remark:

1. Before use, please confirm whether this product is suitable for your design, Scientific only ensure products meet this specification.
2. This specification data change must be confirmed by both parties,any individual modification is invalid.
3. If customer placed orders without signing back this specification, it is regarded as recognition.



绵阳敦源电子科技有限公司

Mianyang Dunyuan Electronics Technology Co.,Ltd

地址：四川省绵阳市高新区综合保税区


ADD: Comprehensive Bonded Zone, High-Tech Industrial Development Zone Mianyang, SiChuan

[illegible]

DESCRIPTION	EEC P/N	SPEC NO.:	VERSION NO.: V0.1
Automotive Ethernet	AC-3225B-800U3		PAGE: 1/8

1 Features And Benefits


- Automotive Ethernet 1000BASE-T1 Application
- High-quality Product That Uses Auto Winding
- Meet IEEE802.3bp and OA TC12 v2.0 Requirements
- Tested with leading PHY partners
- Meets AEC-Q200 Requirement
- Operating Temperature: - 40°C to +125°C
- R&D and Factory IATF-16949 Certified
- Open Alliance TC12 test report available




2 Electrical Specifications @ 25°C

Part Number	Inductance (μH) Typ 100KHz,0.1V	RDC (Ω)Max	Isolation Resistance (MΩ) Min	Rated Current (mA) Max	Rated Voltage (V) Max
AC-3225B-800U3	80	2.5	10	150	80

3 Dimensions (mm)& recommend layout

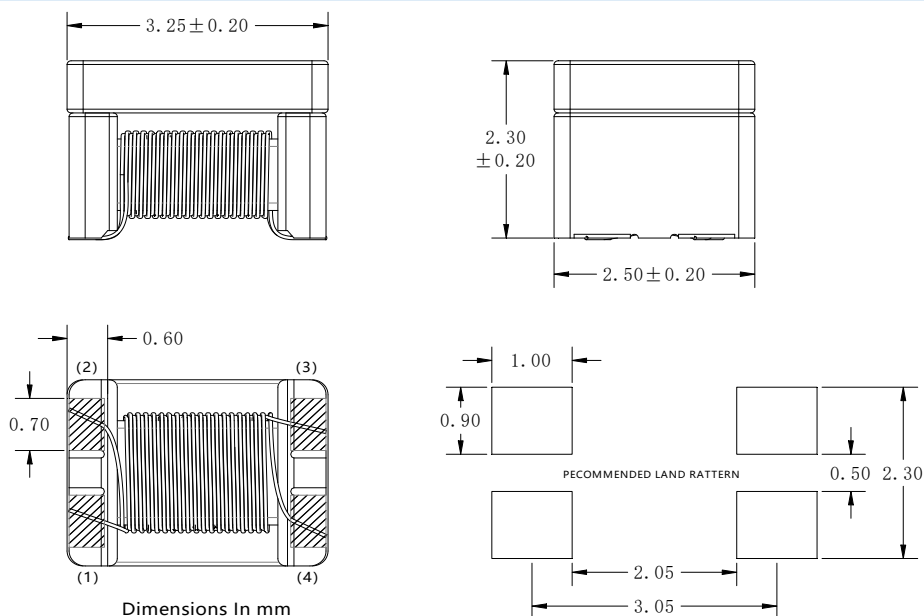

4 Schematics

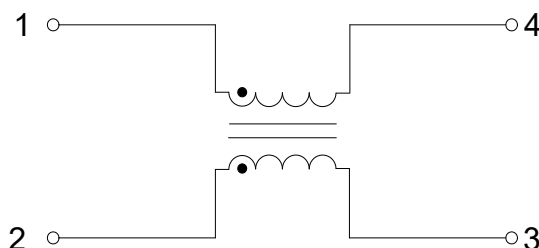





DESCRIPTION	EEC P/N	SPEC NO.:	VERSION NO.: V0.1
Automotive Ethernet	AC-3225B-800U3		PAGE: 2/8



Specification for Approval

5 S-Performance Vs. Frequency

Part Number	Insertion Loss (dB MAX)			Return Loss (dB MIN)			Common Mode Rejection (dB MIN)			Differential to Common Mode Rejection (dB MIN)	
	20 MHZ	100 MHZ	400 MHZ	30-80 MHZ	200 MHZ	600 MHZ	10 MHZ	30-200 MHZ	600 MHZ	1-80 MHZ	600 MHZ
AC-3225B-800U3	-0.5	-0.8	-1.5	-25	-20	-14.5	-32.5	-42	-32.5	-65	-47.5

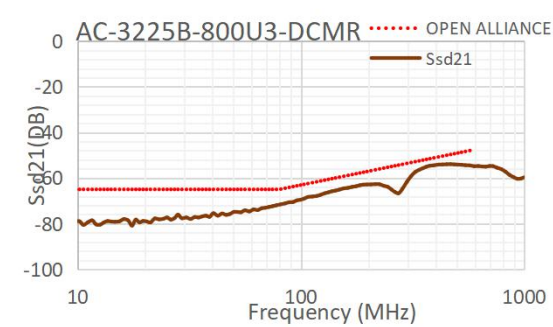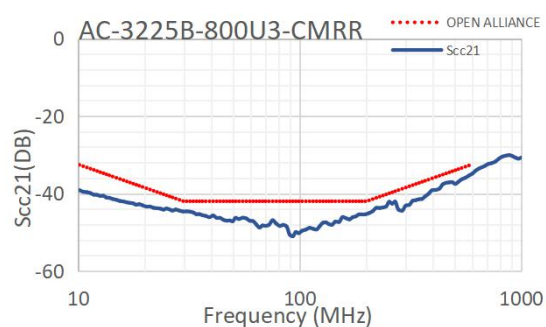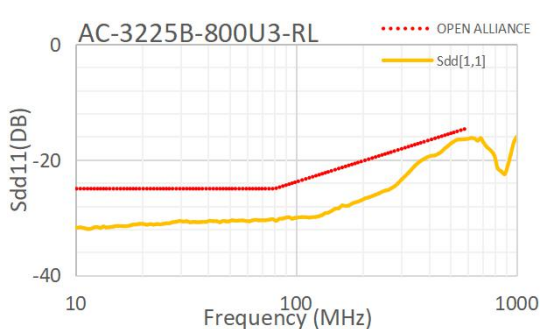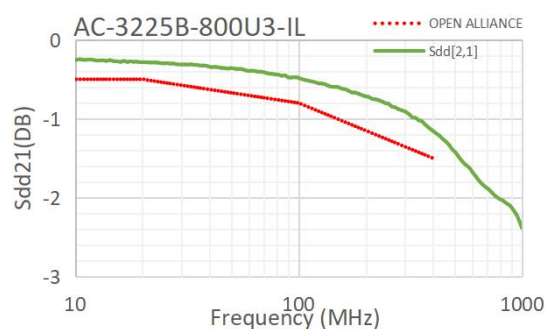


Measurement Equipment

Product No.


E5071B

*Equivalent Measurement Equipment May Be Used.

DESCRIPTION	EEC P/N	SPEC NO.:	VERSION NO.: V0.1
Automotive Ethernet	AC-3225B-800U3		PAGE: 3/8

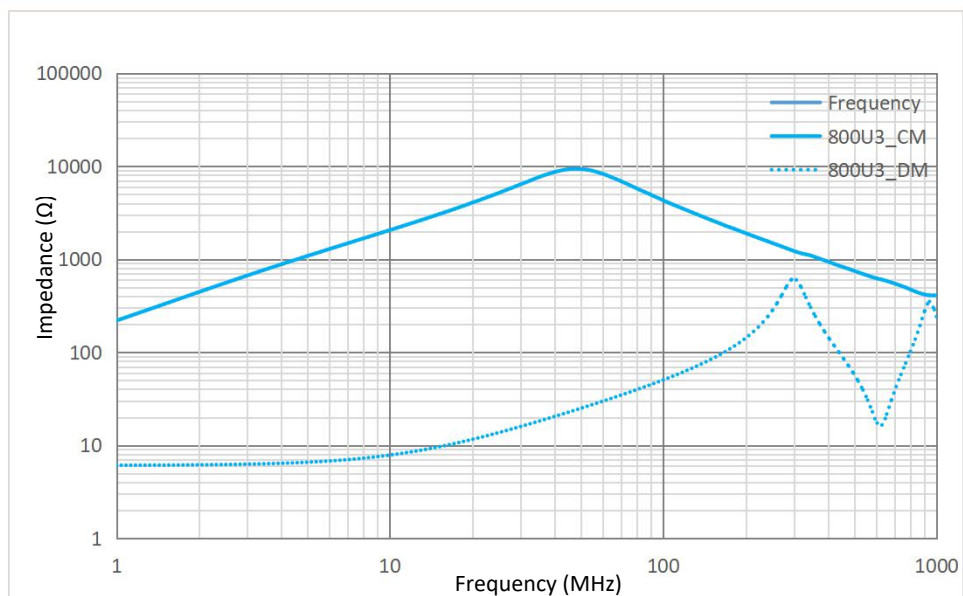
6 Impedance VS. Frequency

Product No.	Manufacturer
E4991A	Keysight Technologies
*Equivalent Measurement Equipment May Be Used.	

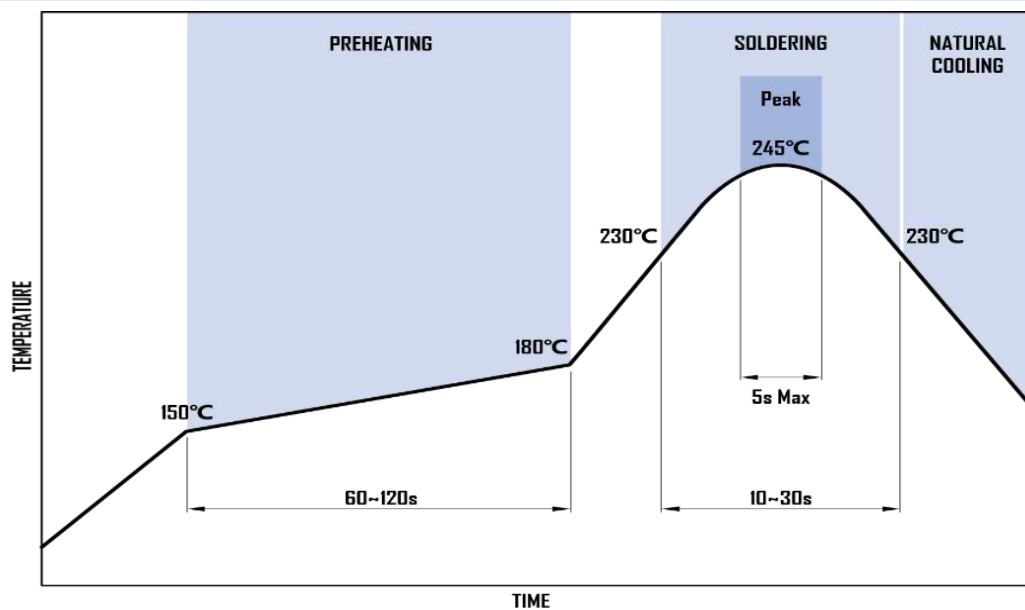
7 Recommended Reflow Profile

DESCRIPTION	EEC P/N	SPEC NO.:	VERSION NO.: V0.1
Automotive Ethernet	AC-3225B-800U3		PAGE: 4/8


8 Packaging specification

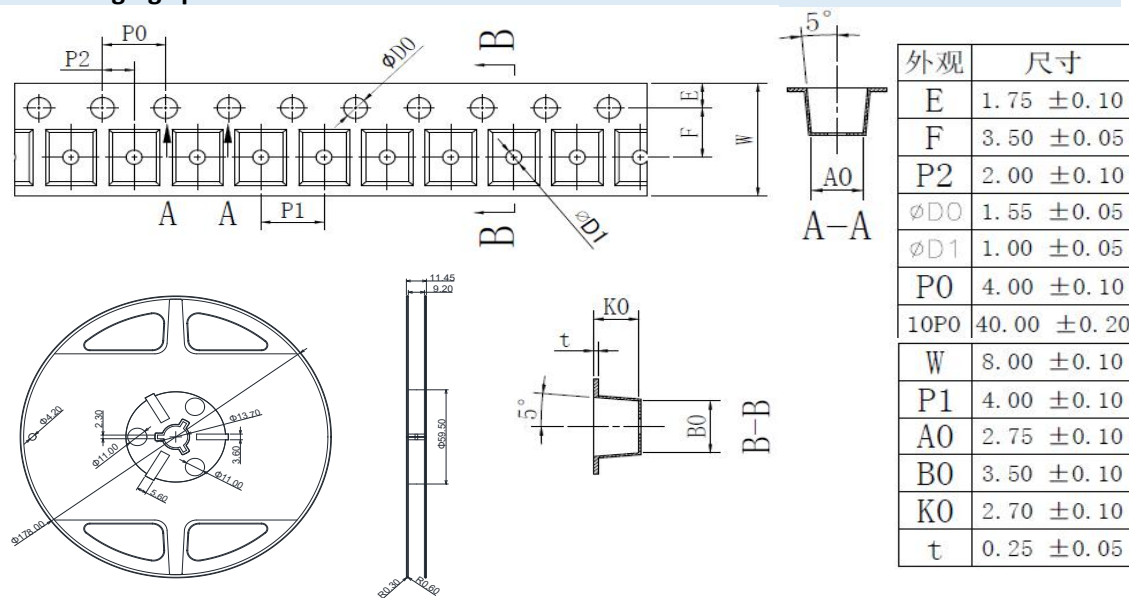


Four Reel

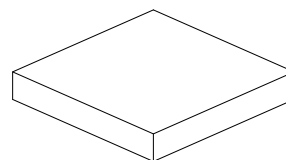

Inner Carton



Five Inner Carton

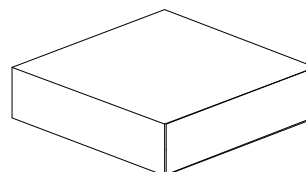

Export Carton

Package Quantity:

One Reel=1500 Pcs

One Inner Carton=1500*4=6000 Pcs

One Export Carton=6000*5=30000 Pcs

DESCRIPTION	EEC P/N	SPEC NO.:	VERSION NO.: V0.1
Automotive Ethernet	AC-3225B-800U3		PAGE: 5/8

9 Reliability test

NO.	Test Item	Standard Reference	Test Condition
1	High temperature storage test	MIL-STD-202 Method 108	1、 1000 hrs. at rated temperature (e.g. 85°C part can be stored for 1000 hrs. at 85°C. Same applies for 125°C part. Unpowered. 2、 Remeasure the parameters at 250hrs & 500hrs in addition to measuring them 3、 Measurement at 24±4 hours after test conclusion.
2	Temperature Cycling	JESD22 Method JA-104	1、 1000 cycles (-40°C to +125°C). Note: If 85°C part or 105°C part the 1000 cycles will be at that temperature. 2、 Sock Time : 30min 3、 Measurement at 24±4 hours after test conclusion. 30min maximum dwell time at each temperature extreme. 1 min. maximum transition time
3	Biased Humidity	MIL-STD-202 Method 103	1、 Time: 1000 hours, Temperature: 85±2°C / humidity:85±2%RH 2、 Measurement at 24±4 hours after test conclusion.
4	Operational Life	MIL-STD-202 Method 108	1、 1000 hrs. @ 105°C. If 85°C or 125°C part will be tested at that temperature. (Refer to DS) 2、 Remeasure the parameters at 250hrs & 500hrs in addition to measuring them at the end of the test. 3、 Measurement at 24±4 hours after test conclusion.
5	Resistance to Solvents	MIL-STD-202 Method 215	1、 It is applicable to marked and/or coated components. 2、 Add Aqueous wash chemical OKEMCLEAN (A 6% concentrated Oakite cleaner) or equivalent. Notes: Do not use banned solvents.
6	Mechanical Shock	MIL-STD-202 Method 213	1、 Figure 1 of Method 213. Condition C : Peak value:100g's; Normal duration(D):6ms; Waveform:Half-sine; Velocity change(Vi)ft/sec:12.3 2、 18 cycles each of 6 orientations at 1500g's
7	Vibration	MIL-STD-202 Method 204	5g's for 20 min., 12 cycles each of 3 orientations Note: Use 8"X5" PCB .031" thick 7 secure points on one long side and 2 secure points at corners of opposite sides. Parts mounted within 2" from any secure point. Test from 10-2000 Hz.(12 cycles each of 3 orientations at 5g's/ 0.5" / 10-2000 Hz.)
8	Resistance to Soldering Heat	MIL-STD-202 Method 210	Condition B No pre-heat of samples. Note: Single Wave Solder -Procedure 2 for SMD and Procedure 1 for Leaded with solder within 1.5mm of device body. Condition B include the follow conditions: 1.Temperature(°C): 260±5 (solder temp) ; 2.Time(s):10±1; 3.Temperature ramp/immersion and emersion rate:25mm/s±6mm/s;

DESCRIPTION	EEC P/N	SPEC NO.:	VERSION NO.: V0.1
Automotive Ethernet	AC-3225B-800U3		PAGE: 6/8

9	Solderability	J-STD-002	1、 For both Leaded & SMD. Electrical Test not required. Magnification 50 X. Conditions: Leaded: Method A @ 235°C. SMD: a) Method B, 4 hrs @155°C dry heat @235°C b) Method B @ 215°C category 3(8 hrs steam). c) Method D category 3(8 hrs steam). @ 260°C.
10	Electrical Characterization	User Spec	1、 Parametrically test per lot and sample size requirements, summary to show Min,Max, Mean and Standard deviation at room as well as Min and Max operating temperatures. a) High Temp. TR at 125°C (Refer to DS) b) Room Temp. TR at 25°C c) Low Temp. TR at -40°C
11	Flammability	UL-94	V-0 or V-1 Acceptable. Test is applicable to components having a resin case.
12	Board Flex	AEC-Q200-005	Required for MLCCs only. 60 sec minimum holding time.
13	Terminal Strength(SMD)	AEC-Q200-006	1、 Unless otherwise specified, the SMD shall be tested while mounted onto a .062 inch thick FR-4 PCB using 1 ounce of Copper. 2、 Apply a 17.7 N (1.8 Kg) force to the side of a device being tested. This force shall be applied for 60 +1 seconds.
14	External Visual	MIL-STD-883 Method 2009	Inspect device construction, marking and workmanship. Electrical Test not required.
15	Physical Dimension	JESD22 Method JB-100	Verify physical dimensions to the applicable device specification. Note: User(s) and Suppliers spec, electrical Test not required.

DESCRIPTION	EEC P/N	SPEC NO.:	VERSION NO.: V0.1
Automotive Ethernet	AC-3225B-800U3		PAGE: 7/8

 REMINDERS

- The best assembly quality guarantee period of product: 12 months (From shipment date)
Storage condition : seal in packaging, (temperature: 5 to 40°C, humidity: 10 to 75% RH or less).
- If taking out for use, the remaining products should be sealed in plastic bags and preserved in accordance with the above conditions, to avoid oxidation of electrodes and affect soldering status.
- Do not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.)
- Before soldering, be sure to preheat components.
The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Always handle products with care to avoid damage.
- Do not touch electrodes with bare hands directly, as oil secretions may inhibit soldering.
Always ensure optimum conditions for soldering.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Use a wrist band to discharge static electricity in your body through the grounding wire.
- Do not expose the products to magnets or magnetic fields.
- Do not use for a purpose outside of the contents regulated in the delivery specifications.

DESCRIPTION	EEC P/N	SPEC NO.:	VERSION NO.: V0.1
Automotive Ethernet	AC-3225B-800U3		PAGE: 8/8